

PUMP OILERS

GOLDEN ROD

Hydraulic

Easy thumb pressure pumps oil in any direction in controlled volume from 1 drop to a solid stream. Will throw a stream of oil 30 feet and produce 250 lbs. pressure at spout tip. Handles any oil that flows.

For farm machinery, garages, mills, mines, shipyards, shops, factories and oil field equipment.

Extra heavy steel body $3\frac{1}{2}$ inches in diameter, welded steel construction. Precision pumping assembly of rust-proof metal alloy. One piece natural grip steel handle. Easily taken apart for cleaning or repairing.



Standard Spout

Heavy tubing spout with detachable brass tip.

| Each | | | Capacity, pts. | Spout, ins. | Wt. Ctn., lbs. | Each |
|---------|--------|---------------------|-------------------|----------------|-------------------|--------|
| K3300H | (120) | X2D53 | 2 | 12 | 14 | \$3.80 |
| KK3300H | (120) | X2D53—(Case lots 6) | | | | |
| K3306H | (1020) | X2D27 | 1 | 8 | 12 | 3.40 |
| KK3306H | (1020) | X2D27—(Case lots 6) | | | | |

Six in ctn.

Flexible Spout

Highest grade flexible spout with short steel fitting at bottom and brass tip.

| Each | | | Capacity, pts. | Spout, ins. | Wt. Ctn., lbs. | Each |
|---------|---------|---------------------|-------------------|----------------|-------------------|--------|
| K3302H | (120F) | X2D67 | 2 | 15 | 14 | \$4.00 |
| KK3302H | (120F) | X2D67—(Case lots 6) | | | | |
| K3328H | (1020F) | X2D40 | 1 | 10 | 12 | 3.60 |
| KK3328H | (1020F) | X2D40—(Case lots 6) | | | | |

Six in ctn.



EAGLE

Designed for use on the farm, in the home, factory, work shop, garage or service station.

Delivers one drop or full stream under finger lever control.

Aluminum seamless reinforced beaded body. Seamless brass spout $5\frac{1}{4}$ inches long with detachable cone shaped brass tip. Red cap and finger lever control. Easy to hold, operate and fill. No pump leathers.

Capacity $5\frac{1}{2}$ Ounces

| | | | | | |
|--------------|------|---------|--|--|--------|
| Per Ctn. (6) | | | | | ▲ Each |
| K3315H | (33) | X6D00 ★ | | | \$1.50 |

Six in attractive counter display ctn. Wt. ctn. $4\frac{1}{2}$ lbs.



EAGLE

HYDRAULIC FORCE FEED RAINBOW ASSORTMENT



For use on tractors, threshers, automobiles, steam shovels, farm implements and machinery. Will deliver oil in full stream or a drop at a time under perfect control—pumps any oil that flows all year 'round.

The spout, pump and handle is one detachable unit, easily cleaned and assembled.

New type detachable welded steel bent spouts 6 inches long, with brass couplings and machine cut threads. New type one piece handle and thread protector. Spout and handle coppered.

Solid brass hydraulic pump—no leathers—machined and ground plunger and tube. Ball valves. Height over all $9\frac{1}{4}$ inches.

Seamless drawn steel body, tinned to prevent corrosion—enameled assorted colors—red, blue and green. Genuine double seamed bottom.

Capacity $\frac{3}{4}$ Pint

Assortment consists of six oilers—Assorted colors, red, green and blue.

Per Asst. (6) ▲ Each

K3331H (RD) X6D00 ★ \$1.50

One assortment in an attractive display carton.

Opens like a book—Set up quickly and easily.

Wt. per asst. $4\frac{3}{4}$ lbs.

OILERS

EAGLE

HYDRAULIC PUMP OILERS



K3339H-28



K3341H-2912A

Copperite Finish

Detachable and interchangeable spouts
Positive action pump.

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|--------------|------------------------|-------------------------|---------------------|--------|
| | (28) | | | |
| K3339H X1D93 | 1 | 9 | 7 | \$2.90 |
| | (2912A) | | | |
| K3341H X2D27 | 2 | 12 | 8 3/4 | 3.40 |
| Six in box | | | | |




Flexible Spout—Copperite Finish

Detachable and interchangeable spout.
Positive action pump.

Capacity 1 Pint
13 inch Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|----------------------------|------------------------|-------------------------|---------------------|--------|
| K3340H (328) X2D27★ | | | | \$3.40 |
| Six in box. Wt. box 7 lbs. | | | | |



Super pump. Seamless drawn one-piece beaded brass body. Flanged base prevents tilting. Machine ground brass plunger and bronze ball valves.

"Spark-proof" with a seamless brass spout and detachable brass cone shape grooved tip for easy oiling.

Capacity 6 ounces
4 1/2 inch Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|-------------------|------------------------|-------------------------|---------------------|--------|
| K3303H (66) X1D51 | | | | \$2.26 |



Super pump. One-piece beaded seamless brass body, machine ground brass plunger and bronze ball valves. Flanged base prevents tilting. 3/4 inch diameter asbestos lined flexible steel spout with threaded brass tip and closure cap.

Capacity 6 ounces
6 1/2 inch Flexible Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|--------------------|------------------------|-------------------------|---------------------|--------|
| K3309H (66F) X1D67 | | | | \$2.50 |

Six in box. Wt. box 3 1/2 lbs.



K3317H-145C



K3323H-159C

Copperite Finish
Dome Shaped

Seamless bodies, double seamed bottom. Reinforced insert type spouts. Precision rolled threads on both spout and can insure perfect fit and prevents leakage.

Capacity 1/2 Pint
3 inch Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|-------------------------------|------------------------|-------------------------|---------------------|--------|
| K3317H (145C) D3C9 | | | | \$0.58 |
| Twelve in box. Wt. box 3 lbs. | | | | |

Bent Spout Tip
Capacity 1 Pint
9 inch Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|-------------------------------|------------------------|-------------------------|---------------------|--------|
| K3323H (159C) D4C8 | | | | \$0.72 |
| Twelve in box. Wt. box 5 lbs. | | | | |



Welded Steel

Seamless drawn bodies. Bottom electrically welded to body under electronic control. Reinforced insert type steel spouts, brass bushings—machine cut threads. All spouts interchangeable.

Bent Spout

| Each | Trade Cap., pts. | Lgth. Spout, ins. | Wt. Box, lbs. | ▲ Each |
|---------------|------------------------|-------------------------|---------------------|--------|
| | (3006) | | | |
| K3328H D8C1 | 1 1/2 | 6 | 5 | \$1.22 |
| | (5009) | | | |
| K3334H X1D00 | 1 | 9 | 7 | 1.50 |
| Twelve in box | | | | |

OILERS

EAGLE



One-piece drawn cold rolled steel, heavily electro copper plated and lacquered. Guaranteed genuine double seamed spring steel bottoms. Precision rolled threads that insure perfect fit. 1½-inch wide mouth openings. Reinforced insert-type spout with leather washer.

Copperite Finish

Dome Top, Straight Spout

| Each | Cap., pint | Diam., ins. | Length Spout, Box, ins. | Wt. lbs. ▲ | Each |
|--------|---------------|----------------|-------------------------------|---------------|-----------|
| | (133C) | | | | |
| K3320H | D3C1★ | ½ | 3½ | 3 | 2¼ \$0.46 |
| | (143C) | | | | |
| K3314H | D3C7 | ¾ | 4 | 3 | 4 .66 |
| | (155C) | | | | |
| K3311H | D4C7 | 1 | 4¼ | 5 | 5¼ .70 |

Twelve in box

MOWING MACHINE

The 1½-inch wide mouth opening makes it easy to fill without spilling—No funnel necessary.

Seamless drawn one-piece tinned steel body with genuine double seamed special tinned steel bottom. Reinforced insert-type spout with large round easy-working threads. Leather washer. Positively leakproof.

Diameter 8 inches. Height to top of collar 3¼ inches. Height over all 7¼ inches. Spout 4 inches long.



Economy Assortment

Consists of one dozen ¾-pint oilers—Four each enameled red, green and blue.

| Per Assortment | ▲ Each |
|---|--------|
| K3327H (701) X3D20—Wt. per assortment 3¼ lbs. | \$0.48 |

KX3327H (701) X3D20—(C. L. 12 Ass'ts.)
One assortment in an attractive carton—Opens like a book—Set up quickly and easily.



Capacity ¾ Pint
Plain Finishes
(77T)

| Each | Finish | Spout | ▲ Each |
|---------|--------|-----------------|--------|
| K3329H | D2C3★ | Tinned Straight | \$0.34 |
| KX3329H | D2C3★ | (Case lots 144) | |

Twelve in box, 144 in ctn., Wt. ctn. 48 lbs.
Sold Only In Full Boxes

OILERS

EAGLE



Flexible Spout

Practical for getting into those inaccessible places that cannot be reached with a rigid spout oiler. Spouts have sufficient rigidity to hold a fixed position.

Seamless drawn one-piece high grade cold rolled steel body, with genuine double seamed spring steel bottom. Heavy rolled threads. 1½-inch wide mouth opening. Reinforced insert-type spout 8 inches long, with asbestos lined rustless flexible steel tubing and new sleeve type metal tips.

Copperite Finish

| Each | Cap., pint | Diam., ins. | Wt. Doz., lbs. ▲ | Each |
|--------|---------------|----------------|------------------------|-----------|
| | (113) | | | |
| K3326H | D5C1 | ¾ | 3¼ | 3¼ \$0.70 |
| | (114) | | | |
| K3321H | D5C9★ | ¾ | 4 | 4¼ .88 |

Twelve in a box



New Midget Assortment

Small oilers for light oiling. Long spouts for easy oiling. Ideal for typewriters, recording, transcribing and shaving machines, bicycles, etc.

Dome-shaped copperite finish steel body. Reinforced insert-type spout, all sizes interchangeable.

Consists of 8 oilers—¾ oz. capacity and 4 oilers 1 oz. capacity with 4¾ inch spouts.

(Midget)

| Per Assortment | ▲ Each |
|----------------|--------|
| K3324H X2D00★ | \$0.23 |

Thirty-six ass't. in ctn. Wt. ctn. 36 lbs.



SAFETY CANS

JUSTRITE

Approved by Underwriters Laboratories, Inc.

A safe and sensible way to handle and store explosive or inflammable liquids.


No leakage—No waste.

Efficient and economical.

Equipped with easy, natural opening devices. Cap closes automatically as soon as released.

Safety Feature—Spout cap controlled by strong non-rusting spring which holds cap closed tight. If can is exposed to extreme heat cap opens to release excessive pressure and closes automatically when pressure is relieved.

Heavy lead-coated sheet steel body, double seamed and soldered. Malleable iron handles and nozzles electrically tinned. High gloss red enameled, baked on.



With Trigger Handle

Cap opens when trigger is pulled and closes automatically when released.

| Each | Cap., Gals. | Hgt., ins. | Diam., inches | Each |
|---------|----------------|---------------|------------------|-----------|
| | (231) | | | |
| K3762H | X5D00 | 1 | 11¼ | 7¼ \$7.20 |
| KX3762H | X4D80 | (Case lots 6) | | |

Six in ctn. Wt ctn. 27 lbs.



With Standard Swing Handle

Cap opens when can is tilted by holding handle and raising can for pouring. Closes automatically when in upright position.

Bottom of these cans reinforced by steel ring.

| Each | Capacity gals. | Height in. | Diam., in. | Wt. per Can, lbs. | Each |
|---------|-------------------|---------------|---------------|-------------------------|----------|
| 7-233-H | X6D70 | 3 | 16¼ | 0¾ | 8 \$0.40 |
| 7-235-H | X6D93★ | 5 | 17 | 11½ | 10 10.40 |

One in a carton

NEW DANDY ASSORTMENT

One-piece drawn cold rolled steel, heavily electro copper plated and lacquered. Guaranteed genuine double seamed spring steel bottoms. Precision rolled threads that insure perfect fit. 1½-inch wide mouth openings. Reinforced insert type spout with leather washer.

Copperite Finish Assortment Consists of:

| Nos. | Cap., Pints | Spout | ▲ Each |
|--------|----------------|----------------|--------|
| ¾ Doz. | 133C | ¾ in. straight | \$0.42 |
| ½ Doz. | 149C | ¾ in. bent | .60 |
| ½ Doz. | 135C | ¾ in. straight | .44 |

Per Assortment K3330H (D) X3D67—Wt. per assortment 3¼ lbs. \$0.50
Twelve in attractive ctn.—Opens like a book—Set up quickly and easily.

UTILITY CANS



EAGLE

Welded steel, black enamel finish. Guaranteed against leakage.

Body and breast seamless drawn and welded together electrically.

| Each | Capacity, gals. | No. in Ctn. | Wt. Ctn., lbs. | Each |
|--------|-----------------|-------------|----------------|------|
| 7-62-H | X2D60 | 2 | 6 | 21 |
| 7-65-H | X3D67 | 5 | 4 | 20 |

Sold Only in Full Cartons

FILLER CANS

EAGLE

Duo-Pour

Designed for small openings.

All purpose filler can is made from 26 gauge prime galvanized sheets, seamless drawn body with double seamed bottom. 7½ inch long detachable flexible spout, held by wire clip. Spout is equipped with Nos. S1 and S2 Strainer collars and seamless drawn Duo-Pour spout caps.

Larger spout, 1½ inches in diameter—smaller spout, ¾ inch diameter. Equipped with an oil measure graduated in ¼, ½ and ¾ pint capacities. Height over all 8¾ inches. Diameter 11¼ inches.

Capacity 2½ Gallons

| Each | F. O. B. St. Louis | Zone 1 | Zone 2 | Zone 3 | Zone 4 |
|----------|--------------------|--------|--------|--------|--------|
| 61-2½A-H | N-X2D00 | X2D08 | X2D16 | X2D24 | X2D32 |

Four in ctn. Wt. ctn. 15 lbs.
Sold Only in Full Cartons



Flexo-Spout

Safe, Convenient and Efficient

For filling gasoline supply tanks anywhere.

Supply valve and air vent automatically opens when spout is turned to pouring position and closes when spout is returned to holder.

Body drawn seamless from 24 gauge steel, breast acetylene welded to body. Tapered brass valve securely fastened to breast and reinforced with a steel brace spot welded to tank. Automatic air vent. Detachable asbestos lined, flexible steel pouring spout 9 inches long, ¾ inch diameter outside, with strainer and strainer cap. Bottom reinforced with heavy steel hoop. Ears, spout holder and tilting handle spot welded to body. Gaskets in all filler caps. Bright red finish.

| Each | Cap., Gals. | Height, ins. | Diam., ins. | Wt. ctn., lbs. | Each |
|----------|-------------|--------------|-------------|----------------|--------|
| 61-72½-H | X4D30 | 2½ | 10 | 4½ | \$8.45 |
| 61-75-H | X5D30 | 5 | 15½ | 7½ | 7.05 |

One in ctn.

OILY WASTE CANS

JUSTRITE

Self Closing



For safety and cleanliness in shop, garage, or store. Eliminates hazard from spontaneous combustion of oily waste and from lighted matches or cigarette butts dropped carelessly.

Inspected and approved by Underwriters Laboratories, Inc.

Heavy galvanized sheet steel beaded body double seamed, with rolled top rim. Extra heavy galvanized sheet steel self closing cover (no springs). Band-iron brace riveted on top. Band iron legs and loop handle, securely riveted. Legs raise body of can 4 inches from floor.

With Foot Lever

| Nos. | Size, ins. | Height over all, ins. | Trade cap., gals. | Wt. ctn., lbs. |
|--------|------------|-----------------------|-------------------|----------------|
| 7-5-H | 15½x17 | 21 | 14 | 21 |
| 7-1A-H | 11¼x13 | 17 | 6 | 12 |
| 7-3A-H | 13½x15 | 19 | 10 | 15 |

Without Foot Lever

With Foot Lever

| Each | Zone 1 | Zone 2 | Zone 3 | Zone 4 |
|--------|--------|--------|--------|--------|
| 7-5-H | X10D40 | X10D80 | X11D20 | X11D60 |
| 7-1A-H | X7D20 | X7D47 | X7D74 | X5D90 |
| 7-3A-H | X7D92 | X8D24 | X8D55 | X8D88 |

One in ctn.

GASOLINE CANS DEFIANCE



For filling marine motors, camp stoves, farm and contractor's machinery.

Heavy galvanized iron, double seamed and soldered. Beaded body. Raised bottom. Filler opening fitted with band iron handle. Spout seamed securely and soldered into breast of can. Detachable flexible spout $\frac{1}{4}$ inch diameter with screw cap, can be fastened over top of can by a metal clip. Heavy tinned wire hall with ebonized bail woods. Enamelled red and stenciled "GASOLINE".

| Nos. | Cap., Gals. | Filler Opening, ins. | Length Spout, ins. | Diam., ins. | Height, ins. | Wt., lbs., etc. | No. in ctn. |
|--------|-------------|----------------------|--------------------|------------------|------------------|------------------|-------------|
| 7-D2-H | 2 | 2 | 0 | 8 $\frac{1}{2}$ | 11 $\frac{3}{4}$ | 17 $\frac{1}{2}$ | 6 |
| 7-D3-H | 3 | 2 $\frac{1}{2}$ | 12 | 11 $\frac{1}{4}$ | 11 $\frac{1}{4}$ | 14 | 4 |
| 7-D5-H | 5 | 2 $\frac{1}{2}$ | 12 | 11 $\frac{1}{4}$ | 18 $\frac{1}{4}$ | 20 | 4 |
| Each | F. O. B. | St. Louis | Zone 1 | Zone 2 | Zone 3 | Zone 4 | |
| 7-D2-H | X1D58 | | X1D64 | X1D70 | X1D76 | X1D82 | |
| 7-D3-H | X2D06★ | | X2D12★ | X2D18★ | X2D24★ | X2D30★ | |
| 7-D5-H | X2D23 | | X2D33 | X2D43 | X2D53 | X2D63 | |

Sold Only in Full Cartons

Extra Spouts

With Strainer Disc
For Gasoline Cans Nos. D2, D3 and D5
Length 12 inches

| | |
|--------------------------------------|--------|
| Each | Each |
| K3780H (FS3) D5C5 | \$0.85 |
| Loose. Wt. each 2 $\frac{1}{4}$ ozs. | |

FILLER CANS EAGLE



Squat Model

Safe, Convenient and Efficient

For filling gasoline supply tanks any- where. Supply valve and air vent auto- matically opens when spout is turned to pouring position and closes when spout is returned to holder.

Body drawn seamless from 24 gauge steel, breast acetylene welded to body. Tapered brass valve securely fastened to breast and reinforced with a steel brace spot welded to tank. Automatic air vent. Detachable asbestos lined, flexible steel pouring spout $\frac{1}{2}$ inch diameter outside, with strainer and strainer cap. Bottom reinforced with heavy steel hoop. Ears, spout holder and tilting handle spot welded to body. Gaskets in all filler caps. Bright red finish.

Capacity 2 $\frac{3}{4}$ gallons. Height over all 10 inches. Diameter 11 $\frac{1}{4}$ inches. Length of spout 9 inches.

| Each | Cap., gals. | Height, ins. | Diam., ins. | Wt., Ctn., lbs. | Each |
|------------------------------|-----------------|------------------|------------------|-----------------|--------|
| 61-72 $\frac{1}{2}$ -H X4D30 | 2 $\frac{3}{4}$ | 10 | 11 $\frac{1}{4}$ | 4 $\frac{1}{2}$ | \$5.45 |
| 61-75-H X5D30 | 5 | 15 $\frac{1}{2}$ | 11 $\frac{1}{4}$ | 7 $\frac{1}{2}$ | 7.95 |
| | | One in ctn. | | | |

For Zone Map see Sec. 30—Page 4

STAR ★ DENOTES BEST SELLER

WATER BAGS EAGLE



No pre-soaking—always ready for use. No musty tastes or odors. Canvas bag with metal lock-on cap. Streamlined metal handle, designed to fit grip for easy carrying. Handle clamps firmly to bag but is easy to remove for cleaning. Aluminum non-rust nozzle, sanitary and unbreakable, securely riveted to bag.

| Each | Cap., gals. | Size, ins. | Wt., ea., lb. | Each |
|---------------------|-------------|----------------------|---------------|--------|
| G4726B (EWB1) D9C9 | 1 | 11 $\frac{1}{2}$ x11 | $\frac{3}{4}$ | \$1.50 |
| G4726B (EWB2) X1D06 | 2 | 11 $\frac{1}{2}$ x14 | $\frac{3}{4}$ | 1.50 |

Loose



Traveler


Attractive in appearance. Designed for tourists. No pre-soaking necessary and always ready for instant use.

Sturdy canvas bag, shaped and reinforced to stand up. Will not topple over. Aluminum non-rust nozzle with cap, fastened on a chain.

Removable metal top slide. Rope handle anchored directly to bag through metal eyelets. Size 11 $\frac{1}{2}$ x16 inches.

Capacity 2 gallons

| | |
|----------------------------------|--------|
| Each | Each |
| G4727B (ETB2) X1D13 | \$1.00 |
| Loose. Wt. ea., $\frac{1}{2}$ lb | |

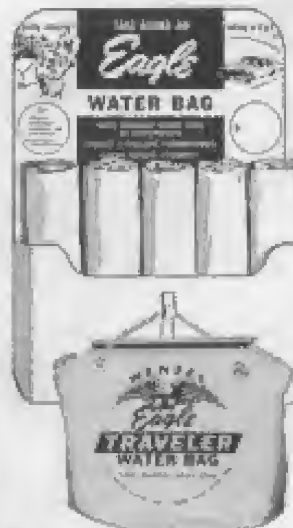

Traveler 6-Pak Display

Rainbow assortment of eye-catching colors.

Assorted two-gallon Salusani Traveler bags keep water cool by evaporation. Compact and unbreakable.

| | |
|-----------------|--------|
| Per Ass. (6) | Each |
| 61-6PAK-B X7D93 | \$1.98 |

One ass. in ctn. Wt. ea., 3 $\frac{1}{2}$ lbs.

Sold Only in Full Cartons